


Invented for life



**BOSCH**

## Gas instantaneous water heater **Therm 4200 & Therm 4300**

Technology that you can simply trust

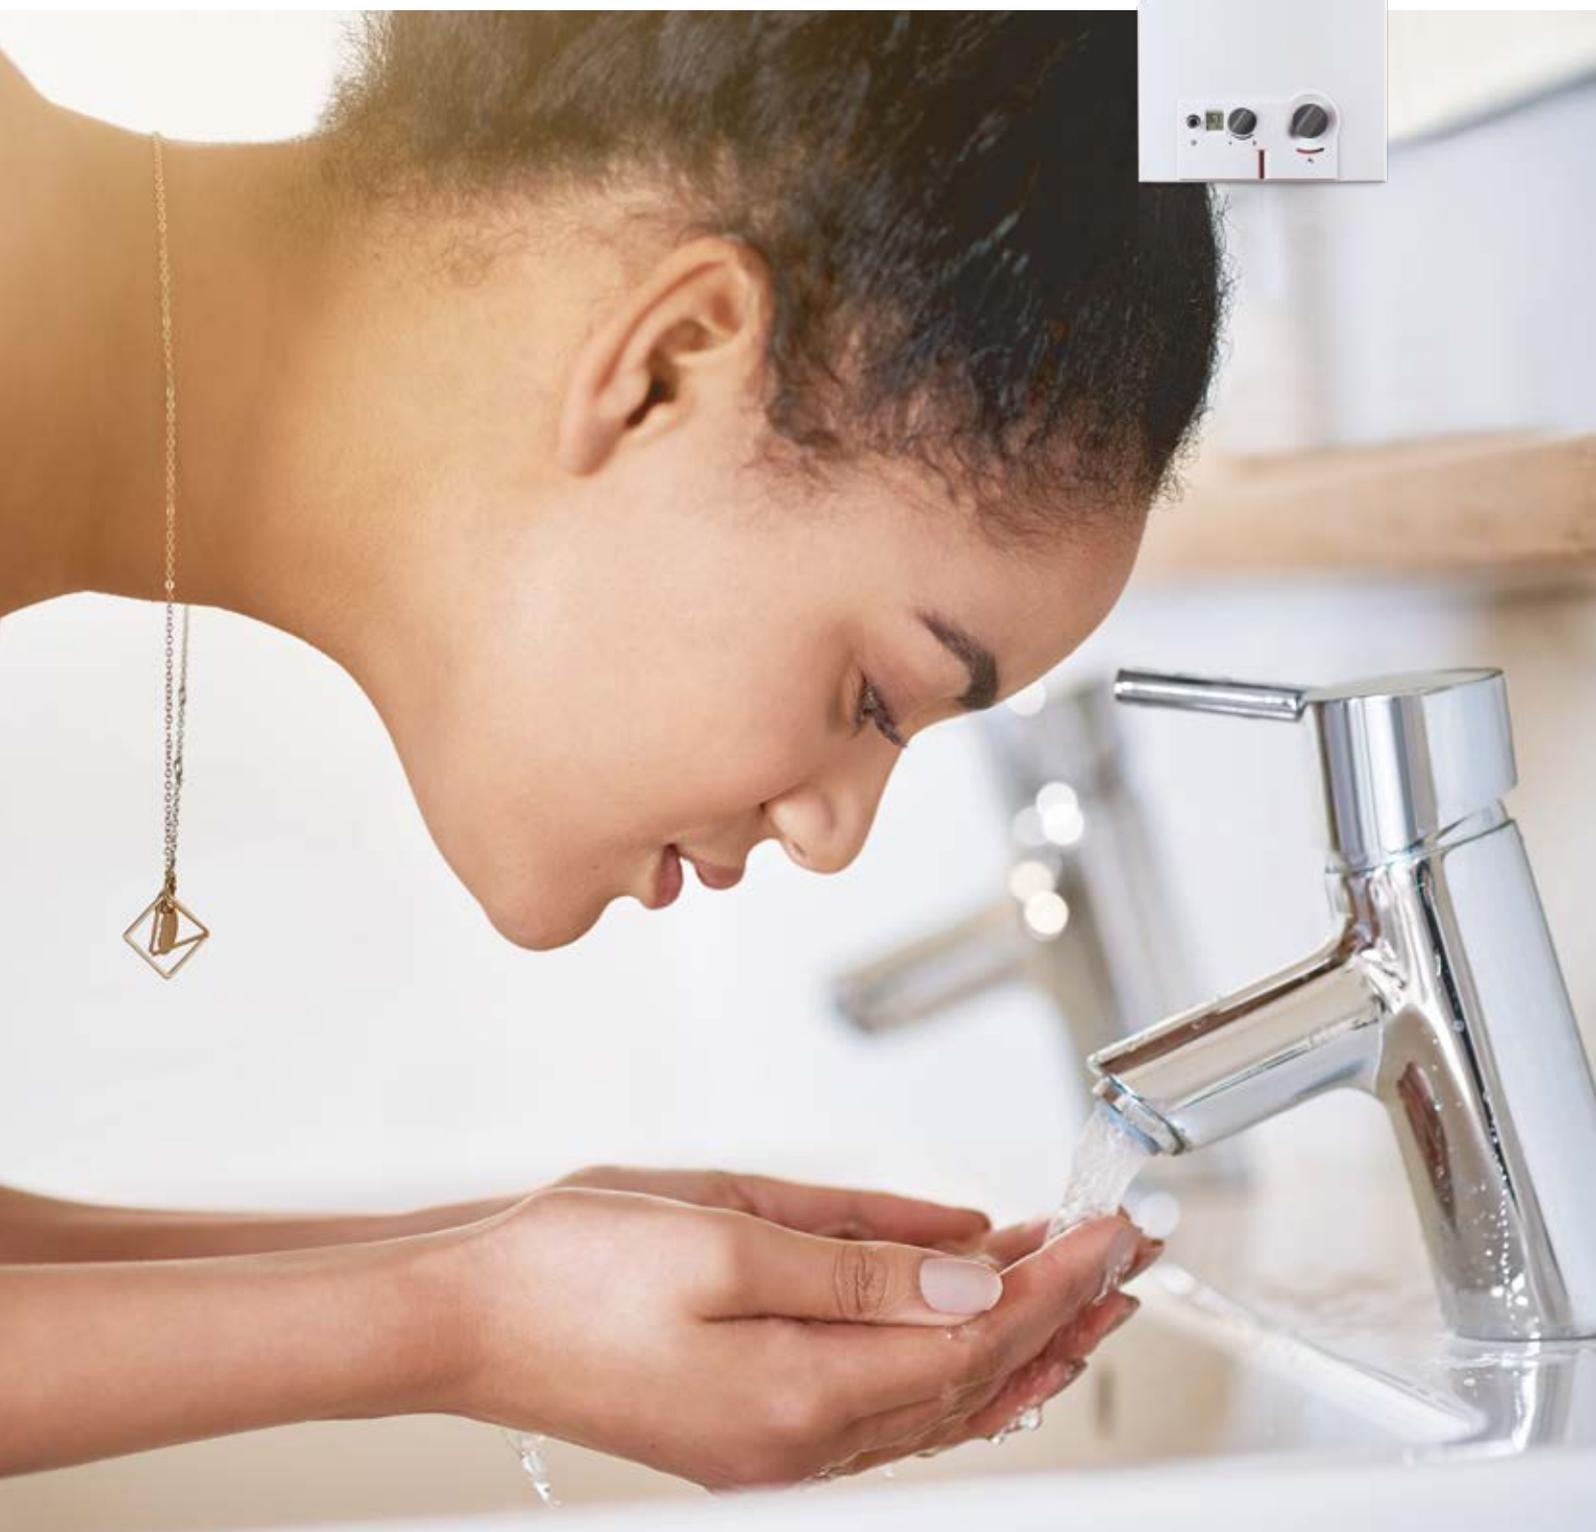

# Maximum comfort with maximum energy saving.

If you're looking for a simple, reliable and efficient solution, you've come to the right place.

The elegant design of the unit enables it to be seamlessly integrated into any kitchen with consummate ease. Besides the elegant cover, an ignition switch, a luminous indicator to show that the flame is present in the water heater as well as a red indicator light to signal a low battery are present.

As our customers comfort and safety have always been our highest priority, safety measures included are:


- ▶ Flame control and security by ionisation
- ▶ Temperature control limiter

Adequate capacity for every need			
Capacities	11 L	14 L	18 L
<b>One point of use</b>			
	■		
	■	■	■
	■	■	■
<b>Various points of use</b>			
 	■	■	■
  			■

 Basin    Shower    Bathtub

## All it takes to fire up a Therm water heater, is the opening of a tap.

Ignition is achieved with the help of a battery or the Bosch Hydro Power ignition system making use of the most clean and economical energy source possible: the force of the water is responsible for the ignition of the burner.

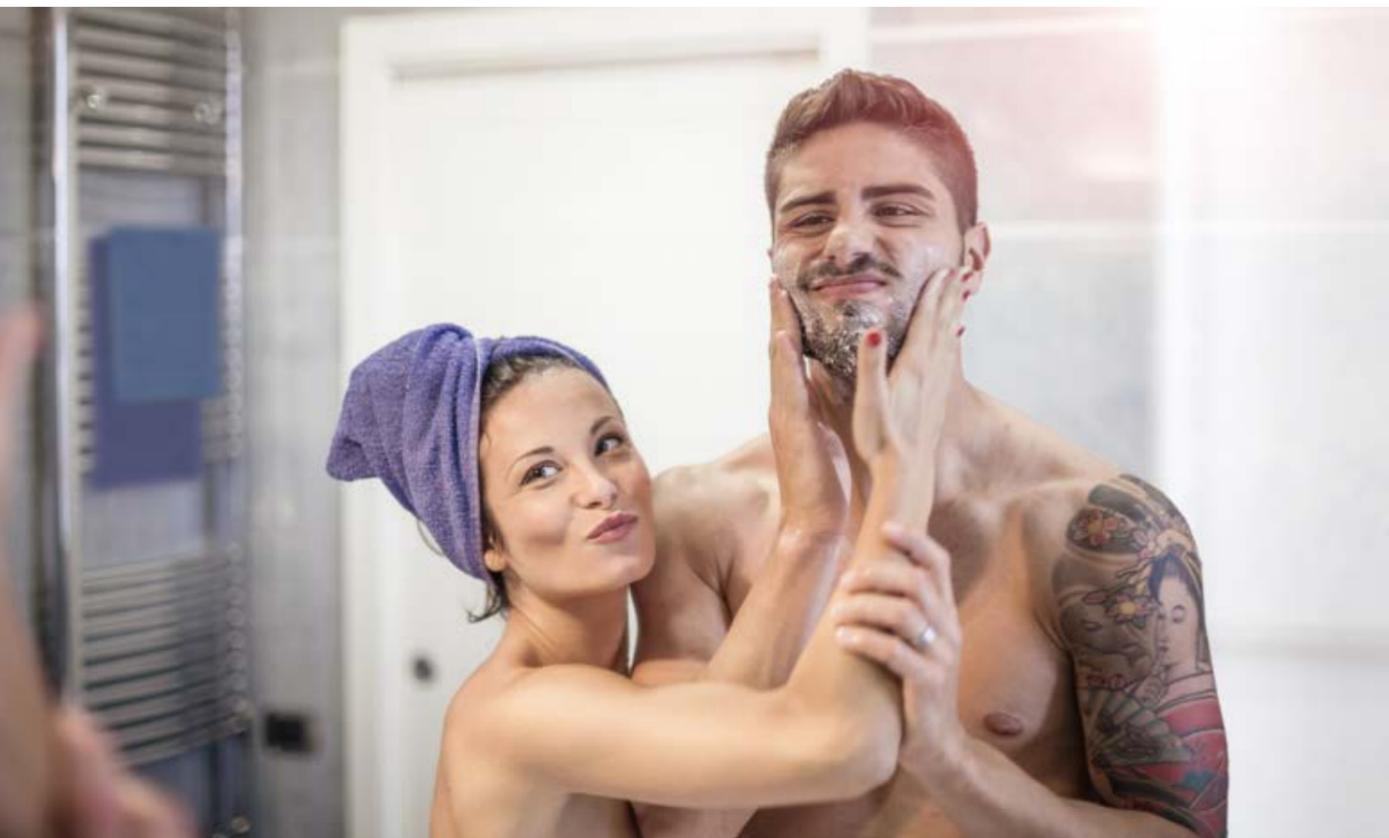

The Therm water heater with battery or hydro ignition have all the qualities expected of a Bosch appliance while at the same time offering you the added benefit of being extremely small, saving much needed space in the modern homes of today.



### At a glance

- ▶ Battery and hydro ignition – no manual ignition required
- ▶ Maximum capacity of 11, 14 and 18 l per minute
- ▶ High quality from Bosch

Model	T4200 11-2D	T4300 11-2D	T4200 14-2D	T4300 14-2D	T4200 18-2D	T4300 18-2D
	Battery	Hydropower	Battery	Hydropower	Battery	Hydropower

### Main Features

Capacity	l/min	11		14		18
Dimensions (H x L x P)	mm	580 x 310 x 220		655 x 350 x 220		655 x 425 x 220
Output (modulation range)	kW	7,0 - 19,2		9,0 - 23,6		9,3 - 29,5

### Gas Supply pressure

LPG Supply Pressure 1)	kPa	2,8				
------------------------	-----	-----	--	--	--	--

### Water system specifications

Max water pressure 2)	MPa	1,2				
-----------------------	-----	-----	--	--	--	--

### Temperature control at maximum setting

Temperature increase	°C	50 <sup>+5</sup>					
Flow range	l/min	2 - 5,5		2 - 7,0		2 - 7,3	
Min. operating pressure	MPa	0,01	0,03	0,01	0,03	0,02	0,045
Minimum pressure for maximum flow	MPa	0,025	0,055	0,035	0,065	0,08	0,08

### Temperature control at minimum setting

Temperature increase	°C	25					
Flow range	l/min	4 - 11		4 - 14		4 - 16,4	
Min. operating pressure	MPa	0,02	0,045	0,02	0,045	0,05	0,06
Minimum pressure for maximum flow	MPa	0,06	0,14	0,1	0,14	0,2	0,22

1) LPG: Butane 45.72 MJ/kg (12.7 kWh/kg) - Propane 46.44 MJ/kg (12.9 kWh/kg)

2) Considering the water dilution effect this value must not be exceeded

**Distributed by:**

**Trojan Trading**

Units 1 & 2 Marconi Mews,  
28 Marconi Road,  
Montague Gardens, 7441  
Tel: 086 100 5195  
Fax: 086 539 6282

**[admin@trojan-trading.co.za](mailto:admin@trojan-trading.co.za)**